


STRUCTURE

Total thickness	2.5mm
No. of plies	2
Fabric	Cotton
Weft	Rigid
Weight	2.50kg/m ²
Working temp.	-5 °C to +90° C

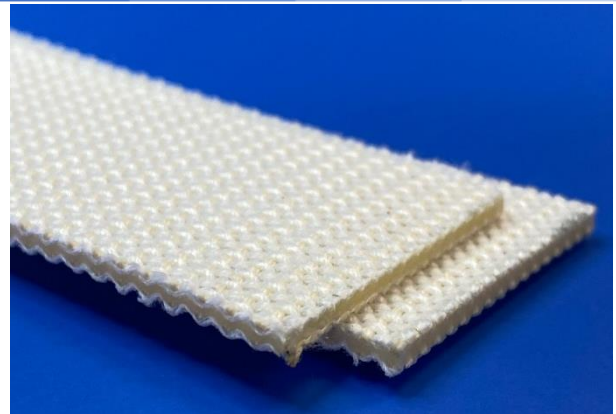

1. Top cover

Top cover thickness	0.0mm
Material	Cotton
Colour	Natural
Surface	Cotton
Hardness	0 shore A

2. Internal cover

Material	PU
----------	----

3. Bottom cover

Material	Cotton
Colour	Natural
Surface	Cotton

TENSIONS

Working load 1% elongation	13N/mm
Breaking load	15N/mm

MIN. DRUM DIAMETER

Flexing	50mm
Back Flexing	50mm

JOIN TYPE

G001SS, UCM36SS, 25LL, Finger Splice

PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Animal Oil & Grease Res.	Yes
Vegetable Oil & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Low Friction	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel driving pulley	0.22
Stainless slider bed	0.28

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au