


## STRUCTURE

|                    |                      |
|--------------------|----------------------|
| Total thickness    | 2.0mm                |
| No. of plies       | 2                    |
| Fabric             | Polyester            |
| Weft               | Rigid                |
| Weight             | 2.4kg/m <sup>2</sup> |
| Working Temp. min. | -10° C               |
| Working Temp. max. | +80° C               |

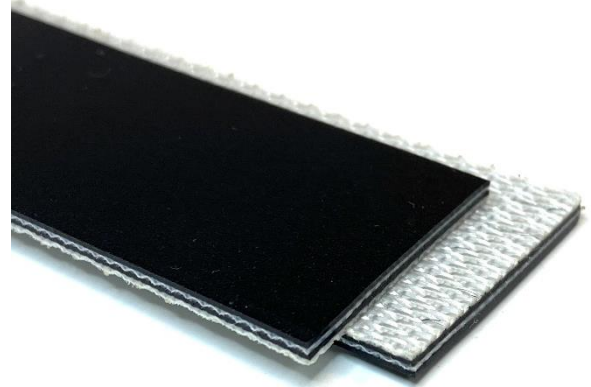

### 1. Top cover

|                     |            |
|---------------------|------------|
| Top cover thickness | 0.5mm      |
| Material            | PVC        |
| Colour              | Black      |
| Surface             | Matt       |
| Hardness            | 80 shore A |

### 2. Internal cover

|          |     |
|----------|-----|
| Material | PVC |
|----------|-----|

### 3. Bottom cover

|          |               |
|----------|---------------|
| Material | Polyester     |
| Colour   | White/Natural |
| Surface  | Bare Fabric   |

## PROFILES APPLICATION

|                         |     |
|-------------------------|-----|
| Profile on top Cover    | Yes |
| Profile on bottom cover | Yes |
| Runner Sidewalls        | Yes |

## SPECIAL CHARACTERISTICS

|                     |     |
|---------------------|-----|
| General Purpose     | Yes |
| Abrasion resistance | Yes |
| Flame retardant     | No  |
| FDA Approved        | No  |
| EU Approved         | No  |
| Antistatic          | Yes |

## TENSIONS

|                            |        |
|----------------------------|--------|
| Working load 1% elongation | 8N/mm  |
| Max. Working Tension       | 12N/mm |

## SUPPORT SURFACE

|                      |     |
|----------------------|-----|
| Slider bed           | Yes |
| Rollers              | Yes |
| Troughed Application | No  |

## MIN. DRUM DIAMETER

|              |      |
|--------------|------|
| Flexing      | 40mm |
| Back Flexing | 60mm |

## COEFFICIENT OF FRICTION

|                      |      |
|----------------------|------|
| Steel driving pulley | 0.31 |
| Plastic slider bed   | 0.25 |

## JOIN TYPE

A40LLSS, RS62SS, Finger Splice

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us on [sales@fdoconnor.com.au](mailto:sales@fdoconnor.com.au)