


STRUCTURE

Total thickness	2.3mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	2.1kg/m ²
Temperature Range	-20° C to + 80° C

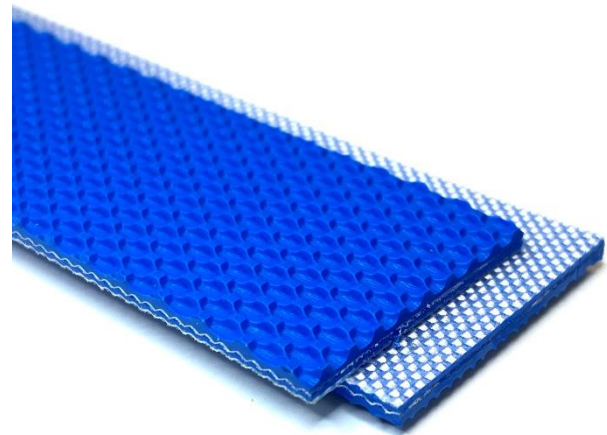

1. Top cover

Top cover thickness	0.50mm
Material	Polyurethane
Colour	Blue
Surface	Neg. Drop (Mini RT)
Hardness	87 shore A

2. Internal cover

Material	Polyurethane
----------	--------------

3. Bottom cover

Material	Polyurethane
Colour	White/Natural
Surface	Polyester IMPGR.

TENSIONS

Working load 1% elongation	7N/mm
Breaking load	12N/mm

MIN. DRUM DIAMETER

Flexing	15mm
Back Flexing	50mm

JOIN TYPE

G00SS, A40LLSS, Finger Splice

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Corrugated Sidewalls	No

SPECIAL CHARACTERISTICS

Minerals, Oils & Fats Res.	Yes
Abrasion resistance	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Antistatic	No

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel driving pulley	0.15
Lagged driving pulley	0.20

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au