


## STRUCTURE

Total thickness	6.3mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	4.9kg/m <sup>2</sup>
Working Temp. min.	-10° C
Working Temp. max.	+90° C

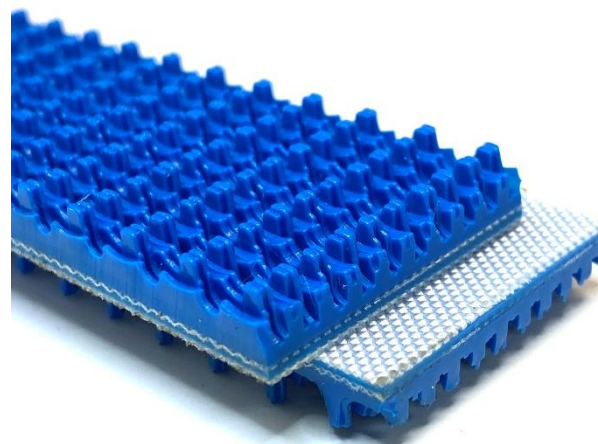

### 1. Top cover

Top cover thickness	3.1mm
Material	PVC
Colour	Blue
Surface	Roughtop
Hardness	55 shore A

### 2. Internal cover

Material	PVC
----------	-----

### 3. Bottom cover

Material	Polyester
Colour	White/Natural
Surface	IMPGR. Fabric

## PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Runner Sidewalls	No

## SPECIAL CHARACTERISTICS

Veg. & Minerals Oils Res.	Yes
Animal Fats Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
Suitable for Incline/decline	Yes

## TENSIONS

Working load 1% elongation	7N/mm
Breaking load	20N/mm

## SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

## MIN. DRUM DIAMETER

Flexing	60mm
Back Flexing	120mm

## COEFFICIENT OF FRICTION

Steel driving pulley	0.15
Lagged driving pulley	0.20

## JOIN TYPE

RS62SS, A40LLSS, Finger O/lap Splice

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us on [sales@fdoconnor.com.au](mailto:sales@fdoconnor.com.au)