

STRUCTURE

Total thickness	4.2mm
No. of plies	3
Fabric	Polyester
Weft	Rigid
Weight	5.3kg/m ²
Working Temp. min.	-5° C
Working Temp. max.	+80° C

1. Top cover

Top cover thickness	1.1mm
Material	PVC
Colour	White
Surface	Smooth
Hardness	70 shore A

2. Internal cover

Material	PVC
----------	-----

3. Bottom cover

Material	Polyester
Colour	White/Natural
Surface	Bare Fabric

TENSIONS


Working load 1% elongation	18N/mm
Breaking load	20N/mm

MIN. DRUM DIAMETER

Flexing	120mm
Back Flexing	150mm

JOIN TYPE

RS125SS, Finger O/lap Splice

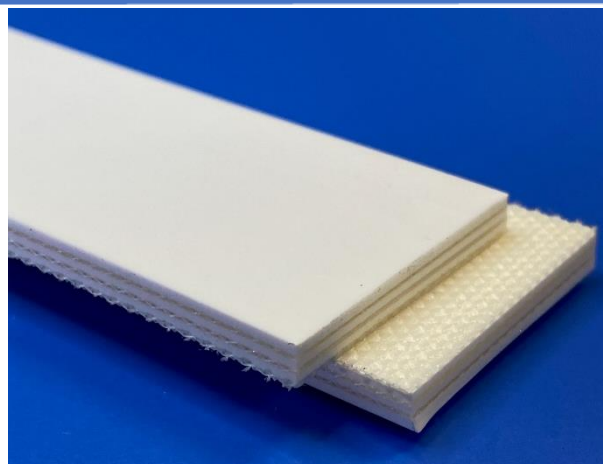

PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes
Runner Sidewalls	Yes

SPECIAL CHARACTERISTICS

Veg. & Minerals Oils Res.	Yes
Animal Fats Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel driving pulley	0.22
Lagged driving pulley	0.28

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au