


STRUCTURE

Total thickness	1.1mm
No. of plies	2
Fabric	Polyester
Weft	Flexible
Weight	1.0kg/m ²
Constant temp. min	-40°C
Constant temp. max.	+80°C

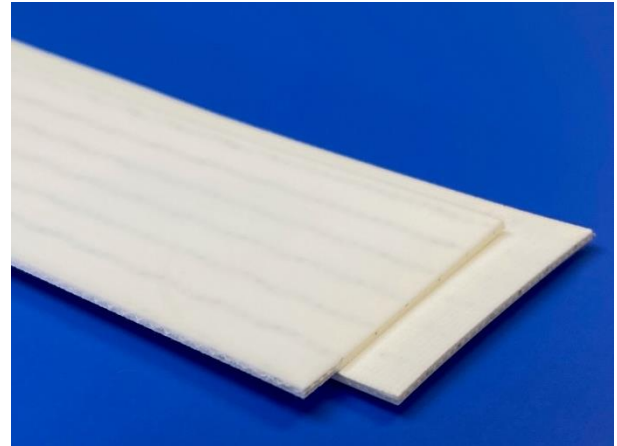

1. Top cover

Top cover thickness	0.15mm
Material	Polyurethane
Colour	White
Surface	Matt

2. Internal cover

Material	Polyurethane
----------	--------------

3. Bottom cover

Material	Polyester
Colour	White/Natural
Surface	IMPGR. fabric

TENSIONS

Working load 1% elongation	4N/mm
Breaking load	8N/mm

MIN. DRUM DIAMETER

Flexing	15mm
Back Flexing	20mm
Nosebar	2mm

JOIN TYPE

G00SS, Finger Splice

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
USDA	Yes
JFRL	Yes
EU Approved	Yes
Antistatic	Yes
Quick Release	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	Yes

COEFFICIENT OF FRICTION

Steel slider bed	0.20
Steel driving pulley	0.15
Lagged driving pulley	0.35

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au