


STRUCTURE

Total thickness	0.7mm
No. of plies	1
Fabric	Polyester
Weft	Rigid
Weight	0.70kg/m ²
Constant temp. min	-30° C
Constant temp. max.	+80° C

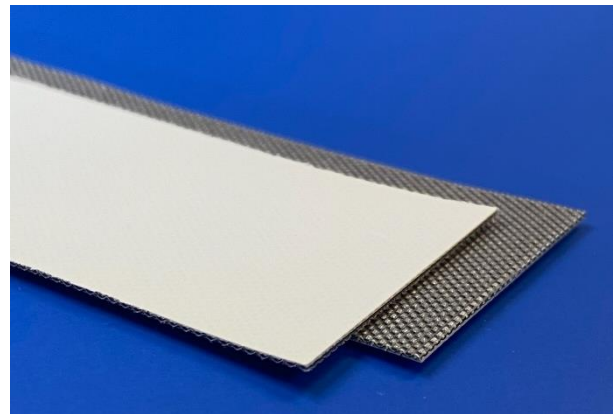

1. Top cover

Top cover thickness	0.25mm
Material	Polyurethane
Colour	White
Surface	Matt

2. Bottom cover

Material	Polyester
Colour	Light Grey
Surface	Polyester IMPGR.

TENSIONS

Working load 1% elongation	3.2N/mm
Breaking load	8N/mm

MIN. DRUM DIAMETER

Flexing	15mm
Back Flexing	15mm

JOIN TYPE

Finger Splice	
---------------	--

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	No
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Antistatic	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel slider bed	0.15
Steel driving pulley	0.15
Lagged driving pulley	0.35

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au