

## STRUCTURE

Total thickness	1.3mm
No. of plies	2
Fabric	Frayless Polyester
Weft	IMGPR. fabric
Weight	1.4kg/m <sup>2</sup>
Constant temp. min	-20°C
Constant temp. max.	+90°C

### 1. Top cover

Top cover thickness	0.3mm
Material	Polyurethane
Colour	Indigo blue
Surface	Matt
Hardness	85 shore A

### 2. Internal cover

Material	Polyurethane
----------	--------------

### 3. Bottom cover

Material	Polyurethane
Colour	White
Surface	Polyester IMPGR.

## TENSIONS


Working load 1% elongation	8N/mm
Breaking load	12N/mm

## MIN. DRUM DIAMETER

Flexing	15mm
Back Flexing	30mm

## FASTENERS

G001SS, G002SS, A40LLSS
A40SP-SS, RS62SS

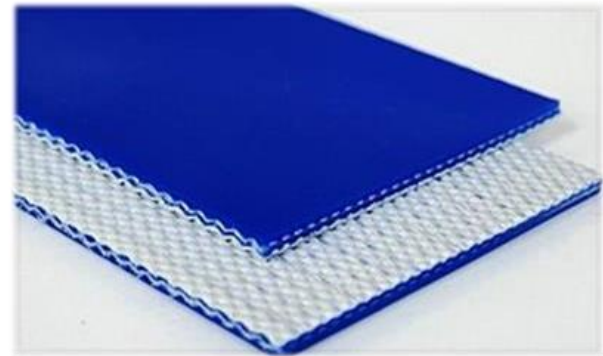

## PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes
Runner Sidewalls	Yes

## SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Excellent
Abrasion resistance	Good
Chemical resistance	Excellent
Flame retardant	No
FDA Approved	Yes
USDA Approved	Yes
HACCP Approved	Yes
EU Approved	Yes
ATEX Approved	No

## SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

## COEFFICIENT OF FRICTION

Steel driving pulley	0.25
Lagged driving pulley	0.35
Stainless slider bed	0.15
Plastic slider bed	0.25