


**STRUCTURE**

Total thickness	0.35mm
No. of plies	1
Fabric	Polyester
Weight	0.25kg/m <sup>2</sup>
Constant temp. min	-30° C
Constant temp. max.	+90° C

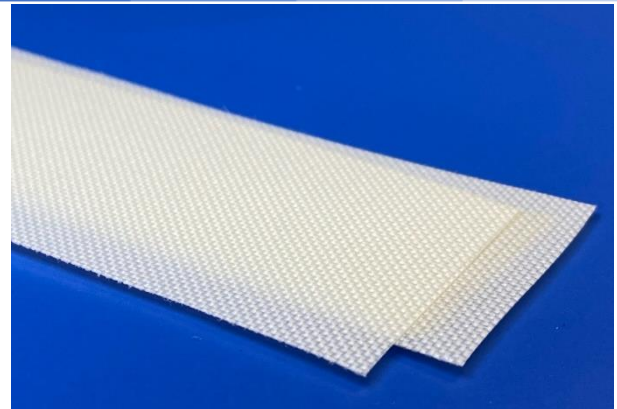

**1. Top cover**

Top cover thickness	0.1mm
Material	PU
Colour	White
Surface	IMPRG Fabric
Hardness	0 shore A

**2. Bottom cover**

Material	Polyester
Colour	White
Surface	IMPRG Fabric

**TENSIONS**

Working load 1% elongation	4.2N/mm
Breaking load	6N/mm

**MIN. DRUM DIAMETER**

Flexing	15mm
Back Flexing	15mm
Nosebar	2mm

**JOIN TYPE**

Finger Splice

**FASTENERS**

Not recommended

**PROFILES APPLICATION**

Profile on top Cover	No
Profile on bottom cover	No
Runner Sidewalls	No

**SPECIAL CHARACTERISTICS**

Animal Oil & Grease Res.	Yes
Vegetable Oil & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
Low Friction	Yes
Metal detector suitable	Yes

**SUPPORT SURFACE**

Slider bed	Yes
Rollers	Yes
Troughed Application	Yes

**COEFFICIENT OF FRICTION**

Steel driving pulley	0.15
Lagged driving pulley	0.35
Steel slider bed	0.25
Stainless slider bed	0.15

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au