


STRUCTURE

| | |
|------------------|------------------------|
| Total thickness | 1.5mm |
| Fabric | NBR |
| Weight | 1.75 kg/m ² |
| Temperature Min. | 0 °C |
| Temperature Max. | 80 °C |

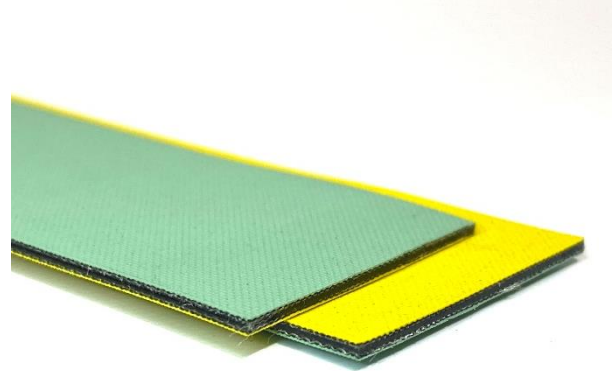

1. Top cover

| | |
|----------|-------|
| Material | NBR |
| Colour | Green |

2. Internal cover

| | |
|----------|-----------|
| Material | Polyamide |
|----------|-----------|

3. Bottom cover

| | |
|----------|--------|
| Material | NBR |
| Colour | Yellow |

JOIN TYPE

Skive Join

COEFFICIENT OF FRICTION

0.7

FOOD APPROVAL

No

TENSIONS

| | |
|----------------------------|----------|
| Working load 1% elongation | 5.0 N/mm |
|----------------------------|----------|

CHARACTERISTICS

Power transmission belting.

MIN. DRUM DIAMETER

| | |
|--------------|------|
| Flexing | 25mm |
| Back Flexing | N/A |

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au