

STRUCTURE

Total thickness	0.9mm
No. of plies	1
Fabric	Polyester
Weight	1kg/m ²
Constant temp. min	-20° C
Constant temp. max.	+80° C

1. Top cover

Top cover thickness	0.2mm
Material	Polyurethane
Colour	White
Surface	Gloss
Hardness	87 shore A

3. Bottom cover

Material	Fabric
Colour	Natural
Surface	Polyester

TENSIONS


Working load 1% elongation	9N/mm
----------------------------	-------

MIN. DRUM DIAMETER

Flexing	10mm
Back Flexing	15mm

JOIN TYPE/FASTENERS

G001SS
Finger Splice

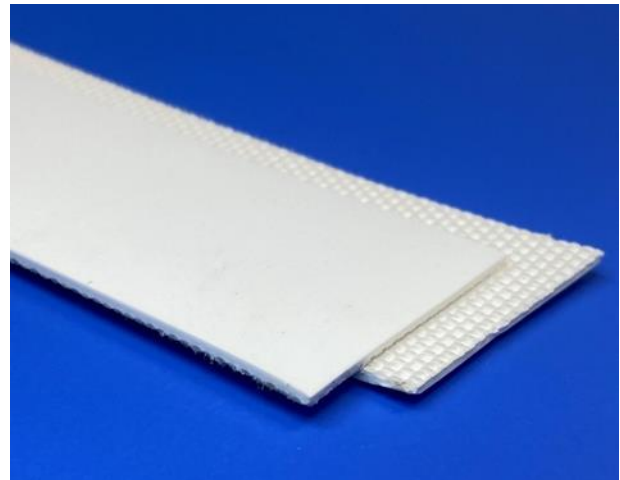

PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes

SPECIAL CHARACTERISTICS

Oils Resistant	Yes
Grease Resistant	Yes
Flame retardant	No
Abrasion Resistant	Yes
FDA Approved	Yes
10/2011/EC + amendments	Yes
Suitable for Curve Conveyors	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	Yes

COEFFICIENT OF FRICTION

Steel driving pulley	0.15
----------------------	------