

## STRUCTURE

Total thickness	1.3mm
No. of plies	1
Fabric	Polyester
Weft	Flexible
Weight	1.45kg/m <sup>2</sup>
Constant temp. min	-40° C
Constant temp. max.	+90° C

### 1. Top cover

Top cover thickness	0.65mm
Material	Polyurethane
Colour	White
Surface	Gloss
Hardness	85 shore A

### 2. Internal cover

Material	Polyurethane
----------	--------------

### 3. Bottom cover

Material	Polyurethane
Colour	White/Natural
Surface	Polyester IMPGR.

## TENSIONS


Working load 1% elongation	15N/mm
Breaking load	20N/mm

## MIN. DRUM DIAMETER

Flexing	10mm
Back Flexing	20mm

## JOIN TYPE

G00SS, Finger splice

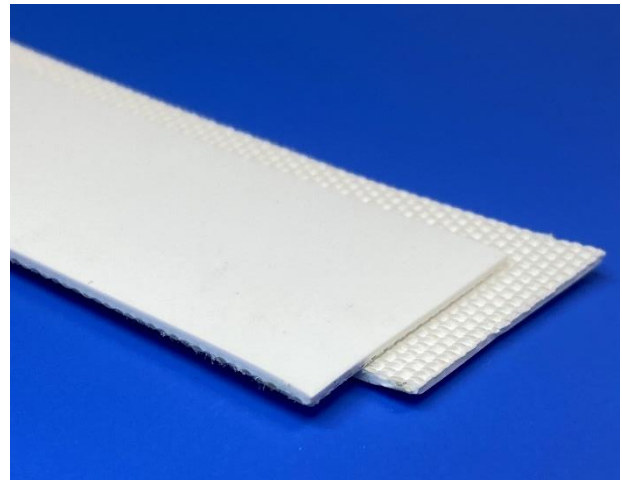

## PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	No
Runner Sidewalls	No

## SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Curve conveyor suitable	Yes

## SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	Yes

## COEFFICIENT OF FRICTION

Steel driving pulley	0.20
----------------------	------

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us on [sales@fdoconnor.com.au](mailto:sales@fdoconnor.com.au)