


STRUCTURE

Total thickness	0.75mm
No. of plies	1
Fabric	Polyester
Weft	Rigid
Weight	0.80kg/m ²
Constant temp. min	-20 °C
Constant temp. max.	+110 °C

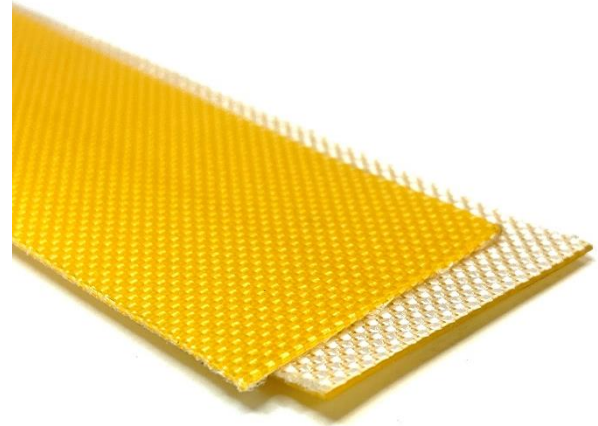

1. Top cover

Top cover thickness	0.25mm
Material	PU
Colour	Amber
Surface	Smooth
Hardness	86 shore A

2. Bottom cover

Thickness	0.10mm
Material	PU
Colour	White/Natural
Surface	IMPRG Fabric

TENSIONS

Working load 1% elongation	5N/mm
Breaking load	60N/mm

MIN. DRUM DIAMETER

Flexing	4mm
Back Flexing	15mm

JOIN TYPE

Finger Splice

PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Animal Oil & Grease Res.	Yes
Vegetable Oil & Grease Res.	Yes
Abrasion resistant	Excellent
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

On Steel	0.17
On Wood	0.29
On Plastic	0.20

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au