


STRUCTURE

Total thickness	0.45mm
No. of plies	1
Fabric	Polyester
Weft	Rigid
Weight	0.3kg/m ²
Constant temp. min	-15 °C
Constant temp. max.	+90 °C

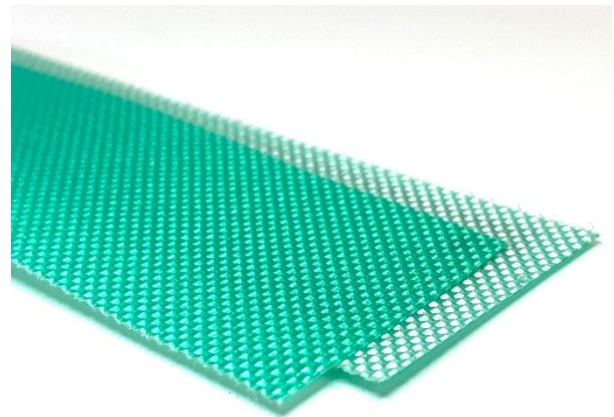

1. Top cover

Top cover thickness	0.1mm
Material	PU
Colour	Green
Surface	Impregnated
Hardness	0 shore A

2. Bottom cover

Material	PU
Colour	Green
Surface	Impregnated

TENSIONS

Working load 1% elongation	5N/mm
Breaking load	7N/mm

MIN. DRUM DIAMETER

Flexing	8mm
Back Flexing	8mm

JOIN TYPE

Finger Splice

FASTENERS

Not recommended

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	No
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Animal Oil & Grease Res.	Yes
Vegetable Oil & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Low Friction	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel driving pulley	0.25
Stainless slider bed	0.15
Plastic slider bed	0.12

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au