


STRUCTURE

| | |
|-----------------|-----------------------|
| Total thickness | 0.7mm |
| No. of plies | 1 |
| Fabric | Polyester |
| Weft | Rigid |
| Weight | 0.76kg/m ² |
| Product Temp. | -40° C to +90° C |
| Ambient Temp. | -25° C to +60° C |

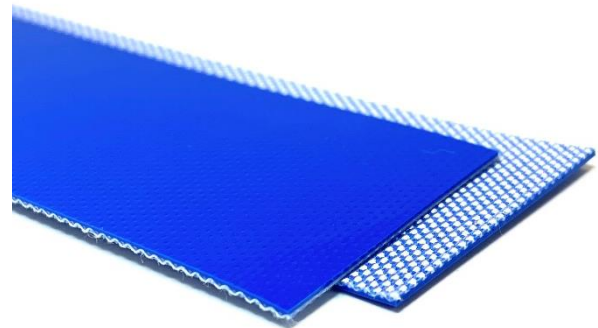

1. Top cover

| | |
|---------------------|--------------|
| Top cover thickness | 0.25mm |
| Material | Polyurethane |
| Colour | Blue |
| Surface | Matt |
| Hardness | 85 shore A |

2. Bottom cover

| | |
|----------|------------------|
| Material | Polyurethane |
| Colour | White/Natural |
| Surface | Polyester IMPGR. |

TENSIONS

| | |
|----------------------------|-------|
| Working load 1% elongation | 5N/mm |
| Breaking load | 8N/mm |

MIN. DRUM DIAMETER

| | |
|--------------|------|
| Flexing | 6mm |
| Back Flexing | 20mm |

JOIN TYPE

Finger Splice

PROFILES APPLICATION

| | |
|-------------------------|----|
| Profile on top Cover | No |
| Profile on bottom cover | No |
| Runner Sidewalls | No |

SPECIAL CHARACTERISTICS

| | |
|------------------------------|-----|
| Minerals, Oils & Grease Res. | Yes |
| Flame retardant | No |
| FDA Approved | Yes |
| EU Approved | Yes |
| ATEX Approved | No |
| Antistatic | Yes |

SUPPORT SURFACE

| | |
|----------------------|-----|
| Slider bed | Yes |
| Rollers | Yes |
| Troughed Application | No |

COEFFICIENT OF FRICTION

| | |
|------------------|------|
| Steel slider bed | 0.20 |
|------------------|------|

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au