


STRUCTURE

Total thickness	6.6mm
No. of plies	2
Fabric	Rubber/Fabric
Weft	Rigid
Weight	4.4kg/m ²
Min Temp.	-10° C to
Max Temp.	+70° C

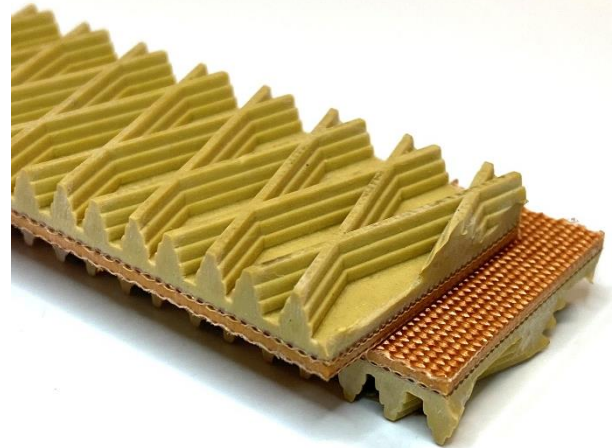

1. Top cover

Material	NBR Rubber
Colour	Tan
Surface	Wedgrip
Hardness	45 shore A

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Corrugated Sidewalls	No

2. Bottom cover

Material	Fabric
Colour	Natural
Surface	Bare Fabric

SPECIAL CHARACTERISTICS

Minerals, Oils & Fats Res.	No
Abrasion resistance	Yes
Flame retardant	No
FDA Approved	No
EU Approved	No
Antistatic	No

TENSIONS

Working load 1% elongation	16N/mm
Breaking load	22N/mm

COEFFICIENT OF FRICTION

Steel driving pulley	0.25
----------------------	------

MIN. DRUM DIAMETER

Flexing	75mm
Back Flexing	N/A

JOIN TYPE

Recessed RS125, Recessed No1 Unibar

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au