


STRUCTURE

Total thickness	1.7mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	1.6kg/m ²
Product Temp.	-40° C to +90° C
Ambient Temp.	-25° C to +60° C

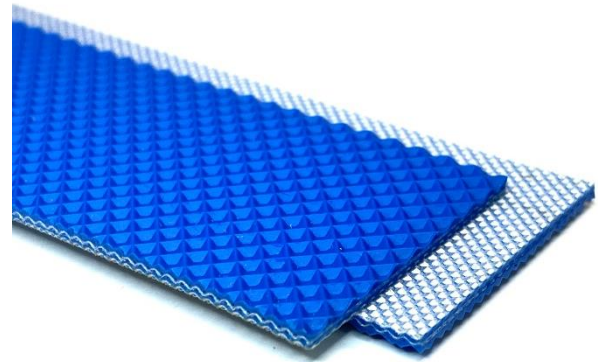

1. Top cover

Top cover thickness	0.55mm
Material	Polyurethane
Colour	Blue
Surface	Diamond Pattern
Hardness	86 shore A

2. Internal cover

Material	Polyurethane
----------	--------------

3. Bottom cover

Material	IMPGR. Polyester
Colour	Natural
Surface	IMPGR. Polyester

TENSIONS

Working load 1% elongation	10N/mm
Breaking load	15N/mm

MIN. DRUM DIAMETER

Flexing	20mm
Back Flexing	50mm

JOIN TYPE

Finger Splice, G00SS

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No
Antistatic	Yes

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel slider bed	0.20
------------------	------

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au