


## STRUCTURE

Total thickness	1.00mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	1.00kg/m <sup>2</sup>
Constant Temp.	-25°C to +90°C
Intermittent Temp.	-30°C to +110°C

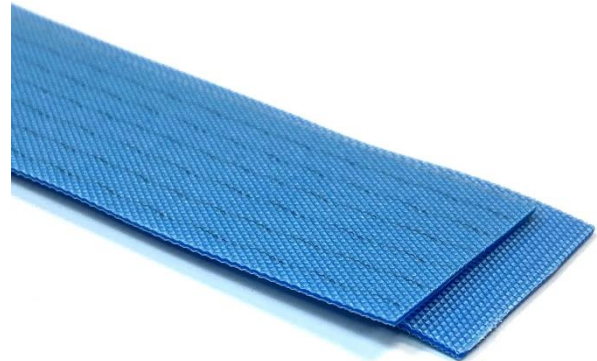

### 1. Top cover

Thickness	0.10mm
Material	IMPGR. Polyester
Colour	Blue
Surface	IMPGR. Polyester

### 2. Internal cover

Material	Polyurethane
----------	--------------

### 3. Bottom cover

Material	IMPGR. Polyester
Colour	Blue
Surface	IMPGR. Polyester

## TENSIONS

Working load 1% elongation	8N/mm
Breaking load	11N/mm

## MIN. DRUM DIAMETER

Flexing	5mm
Back Flexing	5mm

## JOIN TYPE

Finger Splice, G00SS, 25LLSS

## PROFILES APPLICATION

Profile on top Cover	Yes
Profile on bottom cover	Yes
Runner Sidewalls	No

## SPECIAL CHARACTERISTICS

Animal Oils & Grease Res.	Yes
Vegetable Oils & Grease Res.	Yes
FDA Approved	Yes
EU Approved	Yes
Low Friction	Yes
Antistatic	Yes

## SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

## COEFFICIENT OF FRICTION

Steel slider bed	0.15
Plastic slider bed	0.22

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us at [sales@fdoconnor.com.au](mailto:sales@fdoconnor.com.au)