

STRUCTURE

Total thickness	2.8mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	3.2kg/m ²
Working Temp. min.	-10°C
Working Temp. max.	+80°C

1. Top cover

Top cover thickness	1.0mm
Material	PVC
Colour	White
Surface	Longitudinal
Hardness	55 shore A

2. Internal cover

Material	PVC
----------	-----

3. Bottom cover

Material	Polyester
Colour	Natural
Surface	Bare Fabric

TENSIONS


Working load 1% elongation	8N/mm
Max. Working Tension	12N/mm

MIN. DRUM DIAMETER

Flexing	50mm
Back Flexing	75mm

JOIN TYPE

A40LLSS, RS62SS, Finger Splice

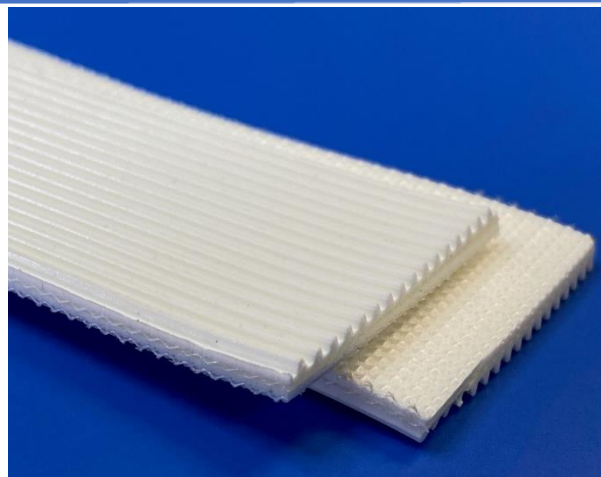

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Runner Sidewalls	No

SPECIAL CHARACTERISTICS

General Purpose	Yes
Incline/decline suitable	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
Antistatic	No

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Steel driving pulley	0.15
----------------------	------

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m² + or - 5% variation.

For more information, please call 03 9462 4544 or email us on sales@fdoconnor.com.au