


## STRUCTURE

Total thickness	5.00mm
No. of plies	2
Fabric	Polyester
Weft	Rigid
Weight	5.4kg/m <sup>2</sup>
Working Temp. min.	-10 °C
Working Temp. max.	+80 °C

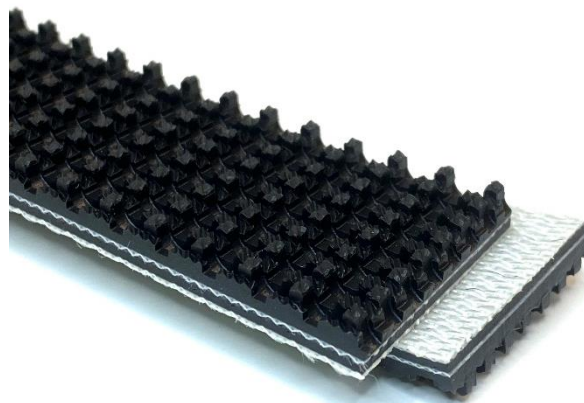

### 1. Top cover

Top cover thickness	3.0mm
Material	PVC
Colour	Black
Surface	Roughtop
Hardness	50 shore A

### 2. Internal cover

Material	PVC
----------	-----

### 3. Bottom cover

Material	Polyester
Colour	White/Natural
Surface	IMPGR. Fabric

## PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes
Runner Sidewalls	No

## SPECIAL CHARACTERISTICS

General Purpose	Yes
Incline/decline suitable	Yes
Flame retardant	No
FDA Approved	No
EU Approved	No
Antistatic	No

## TENSIONS

Working load 1% elongation	10N/mm
Max working tension	14N/mm

## SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

## MIN. DRUM DIAMETER

Flexing	80mm
Back Flexing	100mm

## COEFFICIENT OF FRICTION

Steel driving pulley	0.21
Plastic slider bed	0.18

## JOIN TYPE

RS62SS, A40LLSS, Finger O/lap Splice

The user is responsible for proper selection and use of the product taking into consideration its commercial and industrial needs. Values shown are typical and are subject to change without notice. Specifications are subject to change without notice. Weight tolerance g/m<sup>2</sup> + or - 5% variation.

For more information, please call 03 9462 4544 or email us on [sales@fdoconnor.com.au](mailto:sales@fdoconnor.com.au)