


STRUCTURE

Total thickness	0.7mm
No. of plies	1
Fabric	IMGPR. fabric
Weft	IMGPR. fabric
Weight	0.76kg/m ²
Constant temp. min	-40° C
Constant temp. max.	+90° C

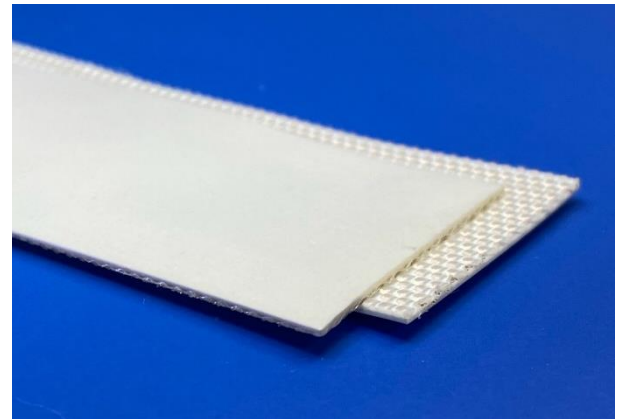

1. Top cover

Top cover thickness	0.25mm
Material	Polyurethane
Colour	White
Surface	Gloss
Hardness	85 shore A

2. Bottom cover

Material	IMGPR. fabric
Colour	White/Natural
Surface	IMGPR. fabric

TENSIONS

Working load 1% elongation	5N/mm
Breaking load	8N/mm

MIN. DRUM DIAMETER

Flexing	6mm
Back Flexing	20mm

JOIN TYPE

Finger Splice
Fasteners not recommended

PROFILES APPLICATION

Profile on top Cover	No
Profile on bottom cover	Yes

SPECIAL CHARACTERISTICS

Minerals, Oils & Grease Res.	Yes
Abrasion resistance	Yes
Nosebar Suitable	Yes
Flame retardant	No
FDA Approved	Yes
EU Approved	Yes
ATEX Approved	No

SUPPORT SURFACE

Slider bed	Yes
Rollers	Yes
Troughed Application	No

COEFFICIENT OF FRICTION

Stainless slider bed	0.20
----------------------	------